

TP22Z-1

50Hz POWERED BY PERKINS SERIES



TECHNICAL SPECIFICATIONS

DIESEL GENERATING SET 400/230V-50Hz-3Phase

Model	TP22Z-1	
Power(ESP)	kVA/kw	22/18
Power(PRP)	kVA/kw	20/16
Rated Voltage	V	400
Rated Current	A	32
Rated rotation speed	r/min	1500
Power Factor		0.8
Fuel Consumption	Litre/hour	5.3
Fuel Tank Capacity	Litre	Open Type :88 / Silent Type:121
Noise level	dB(A)@7m	Silent Type: 66±2

WEIGHT AND DIMENSIONS

GEN-Set	Dimension (L*W*H)	Weight
Open Type	1402mm*715mm*1155mm	534 Kg
Silent Type	1856mm*826mm*1415mm	795 Kg

STANDARDS:

Genset: GB/T2820—2009,ISO8528

Alternator: SINOCO, SMF180C

Diesel Engine: PERKINS , 404D-22G

Standby Power: Continues running at variable load for duration of an emergency. No overload is permitted on these ratings.

Prime Power: Continues running at variable load for unlimited periods with 10% overload available for 1 hour in any 12 hour period.

CONFIGURATION:

Standard: Engine, alternator, cooling system, Base frame (excluding fuel tank), shock absorber, air inlet system, control box (including mains floating charge), plastic fan blades (when the engine and water tank do not bring).

Optional: Base frame (including fuel tank), water jacket heater, fuel water separator, fuel heater, fuel level sensor (only supporting underframe tank), switch box (with switch), power switch, the water level sensor, motor anti condensation heater, automatic fueling system (only supporting base frame including fuel tank), battery frame.

Accessories: Silencer, bellow, exhaust silencing system accessories (with the matching engine), regular battery, starting cord assembly, data of gen-set, random tool (with the matching engine).





ENGINE Specification

Manufacturer: PERKINS

Model	404D-22G
Engine speed Rated	1500 RPM
Cylinder /Arrangement	4 / L
Displacement	2.216 L
Bore and Stroke	84 mm × 100 mm
Compression ratio	23.3 : 1
Max. stand by power at rated RPM	20.6KW
Frequency regulation , steady state	± 0.75%
Governor : type	Mechanical

Exhaust System

Exhaust gas flow	3.94L/min
Exhaust temperature	505 °C
Max back pressure	10.2kPa

Fuel System

Fuel consumption100% (of the Prime Power)	5.3 L / h
Fuel consumption75% (of the Prime Power)	4.0 L / h
Fuel consumption50% (of the Prime Power)	2.9 L / h
Fuel consumption25% (of the Prime Power)	6.1 L / h

Oil system


(Maximum)sump capacity	10.6 L
------------------------	--------

Air intake

Engine air flow	1.45L/min
-----------------	-----------

Coolant System

Radiator & engine capacity	7.0 L
Max water temperature	112 °C
Thermostat	82-95 °C

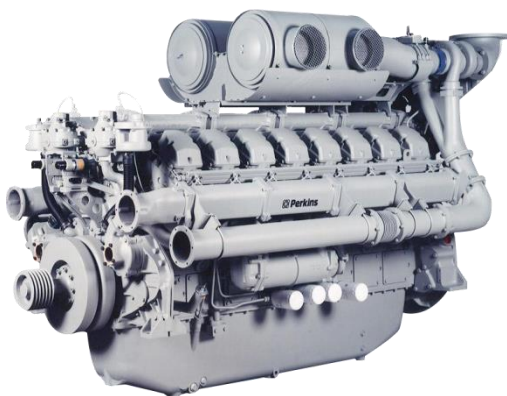

- Perkins engines with fast and reliable cold boost.
- Advanced technology on burning Combustion optimization, low fuel consumption and low noise, emission meets German TALuft standard.
- Reasonable coupling creates best compounding function, provides reliable and high-performance power products.
- Integrated structure of generator with fuel tank and base frame and internal high-efficiency anti-vibration.

Note: All data sheets are for reference only and subject to change without prior notice.





ALTERNATOR Specification

Manufacturer: SINOCOX

Type	SMF180C
Number of phase power	3
Factor (Cos Phi)	0.8
Pole	4
Bearing	1
Coupling	Direct
Exciter type	Brushless SHUNT
Insulation : class , temperature rise	H / H
Degree of protection	IP23
Altitude	≤1000m
Winding Pitch	2/3
Winding Leads	12

FEATURES

- Class H insulation system
- selectable winding, To meet the demand of the bad environment
- 12 Lead Reconnect, able for different voltage, meet the demand of different countries and regions
- 2/3 pitch windings restrain the content of harmonious
- Different Excitation Systems for different load demand
- Ip23 standard protection, IP44 for option
- Provide single bearing or double bearing



STANDARDS

-IEC60034, NEMA MG1-32, ISO8528, CSA
C22.2-100, VDE 0530, GB755

Note: All data sheets are for reference only and subject to change without prior notice.



Control Panel

Model: SGC 420

SINGLE GENSET CONTROLLERS.

DIMENSIONS

OVERALL

233mm x 173mm x 38.5mm

PANEL CUTOUT

219mm x 158mm



KEY FEATURES

- Auto, manual and remote start/stop modes with night restriction option
- 17 inputs, configurable
- 5 resistive
- 2 analogue I/V
- 1 differential
- 9 digital
- 7 digital outputs, configurable
- Modbus over RS-485
- Manually configurable from the controller front buttons or from a PC using DEIF Smart Connect utility software
- Backlit full graphics LCD with power saving feature for extended battery lifetime
- Supports the battery charging alternator I/O interface
- Supports Auto mode (site battery monitoring, AMF, remote start/stop, auto exercise and cyclic) and manual running modes
- Magnetic Pickup Unit (MPU) interface for engine speed measurement
- Auto exercise mode (2 events) to start and stop the genset for a preconfigured time
- Monitors 1-phase/3-phase voltage, frequency, load current and power factor for generator
- Monitors engine safety parameters like lube oil pressure, engine temperature, fuel level and more
- Monitors telecom site battery backup level and shelter temperature to reduce engine running and fuel consumption at telecom tower sites
- Controls start relay, fuel relay, alarm horn and more as digital outputs
- Event log for 100 events with real time clock (RTC) stamps and engine running hours information
- Counters for engine starts, engine trips, engine running hours, genset and Mains kWh, kVAh, kvarh
- Measures mains kW, kVA
- CANbus for engine communication with support for Stage 5/ Tier 4 Final

KEY FUNCTIONS

- LCD display
- True RMS voltage and current monitoring
- RS-485 base communication
- Monitoring of engine and alternator parameters
- Fully configurable inputs and outputs for a wide range of functions